


## LZ Series Ultra Low Impedance

### Features

- ◆ Ultra low impedance in 100KHz.
- ◆ Allow higher ripple current applied due to ultra low impedance.
- ◆ Load life 2000hrs at 105°C
- ◆ Suitable for application of mother board, computer peripheral etc.
- ◆ For more details, please refer to CapXon Engineering Bulletin No. 133
- ◆ RoHS Compliant




### Specifications

Item	Performance Characteristics				
Operating Temperature Range	-40 ~ +105°C				
Rated Voltage Range	6.3 ~ 25V with rate working voltage applied				
Capacitance Range	220 to 3300 $\mu$ F				
Capacitance Tolerance	$\pm 20\%$ (20°C, 120Hz)				
Leakage Current (+20°C, max.)	$I \leq 0.01CV$ or $3 \mu A$ After 2 minutes whichever is greater measured				
Dissipation Factor ( $\tan \delta$ , at 20°C, 120Hz)	Rated Voltage(V)	6.3	10	16	25
	D.F. (%) max	14	12	10	9
For capacitance > 1000 $\mu$ F, add 2% per another 1000 $\mu$ F					
Low Temperature Characteristics (at 120Hz)	Impedance ratio max				
	Rated Voltage(V)	6.3	10	16	25
	Z-25°C / Z+20°C	4	3	2	2
For Capacitance Value > 1000 $\mu$ F, add 0.5 per another 1000 $\mu$ F for -25°C / +20°C add 1 per another 1000 $\mu$ F for -40°C / +20°C					
Load Life	Test Conditions Duration : 2000 hrs Ambient temperature : +105°C Applied voltage : Rated DC working voltage After test requirement at +20°C Capacitance change : Within $\pm 25\%$ of the initial measured value Dissipation factor : Not exceed 200% of the initial specified value Leakage current : Not exceed the specified value				
Shelf Life	Test Conditions Duration : 1000 hrs Ambient temperature : +105°C After test requirement at +20°C Capacitance change : Within $\pm 25\%$ of the initial measured value Dissipation factor : Not exceed 200% of the initial specified value Leakage current : Not exceed the specified value				

### Multiplier for Ripple Current vs. Frequency

CAP( $\mu$ F ) \ Frequency(Hz)	120Hz	1KHz	10KHz	100KHz
100 ~ 330 $\mu$ F	0.40	0.75	0.93	1.00
390 ~ 1000 $\mu$ F	0.50	0.85	0.95	1.00
1200 ~ 3300 $\mu$ F	0.55	0.90	0.98	1.00

### Diagram of Dimensions:(unit:mm)

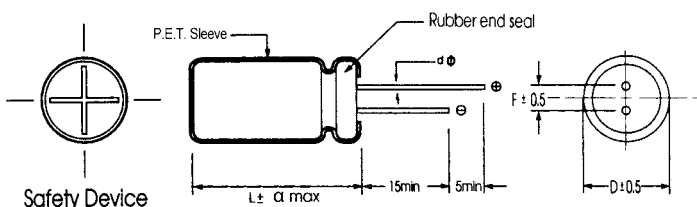

D $\phi$	8	10
F	3.5	5.0
d $\phi$	L < 20 0.5	L $\geq$ 20 0.6

$\alpha$	D < 18	D = 18		D > 18
		L < 35.5	L $\geq$ 35.5	
	1.5	1.5	2.0	2.0

## Case Size

WV		6.3			10			16		
		Size	Ripple	Impedance	Size	Ripple	Impedance	Size	Ripple	Impedance
Cap(μF)										
330							8X11.5	1080	0.038	
470					8X11.5	1080	0.038	8X11.5	1080	0.038
								10X12.5	1500	0.027
560		8x11.5	1080	0.038	8X11.5	1080	0.038	8X16	1450	0.029
680		8x11.5	1080	0.038	8X11.5	1080	0.038	8X16	1450	0.029
								10X12.5	1500	0.027
820		8x11.5	1080	0.038	10X12.5	1450	0.029	8X20	1850	0.020
		8x16	1100	0.036	8X16	1450	0.029	8X20	1850	0.020
1000		10x12.5	1500	0.027	10X12.5	1500	0.027	10X16	1910	0.018
1200		8x16	1450	0.029	8X20	1850	0.020	10X20	2540	0.017
		8x20	1850	0.020	8X20	1850	0.020	10X20	2540	0.015
1500		10x12.5	1500	0.027	10X16	1910	0.018			
1800		10x16	1910	0.018	10X20	2540	0.016	10X25	2800	0.013
		8x20	1850	0.020	10X20	2540	0.015			
2200		10x16	1910	0.018	10X25	2800	0.014			
2700		10x20	2540	0.013						
3300		10x30	2800	0.012						

φ DxL(mm)

WV		25		
Cap(μF)	Size	Ripple	Impedance	
220	8X11.5	1080	0.032	
270	8X11.5	1150	0.031	
	8X11.5	1450	0.029	
330	10X12.5	1850	0.027	
	8X20	1720	0.020	
	10X12.5	1440	0.025	
	10X16	1830	0.022	
560	10X16	1850	0.021	
	8X20	1820	0.018	
	10X16	1920	0.020	
	10X20	2060	0.018	
1000	10X20	2180	0.016	

Ripple Current ( mA, rms ) at 105°C 100KHz

Max ESR (Ω) at 20°C 100KHz