

Data Sheet for Product

Part Number : WM35E2F-YR09B-eA



The Component corresponds with display's hazardous substance management standard and complies with RoHS and Halogen free.

WOOREE E&L Co.,Ltd.

CONTENTS

1. Features
2. Outline Dimension
3. Material Information
4. Absolute Maximum Ratings
5. Electrical / Optical Characteristics
6. Rank Information
7. Characteristic Diagrams
8. Reliability
9. Soldering Information
10. Packaging & Label





1. Features

- SMD Top View Type with Lead Frame Base
- Luminescence Color : White
- Long Time Reliability
- Package Size is 3.5 * 3.5 * 0.65t (mm), 2Lead
- Application : TV BLU
- Injurious Substance : RoHs Compliant, Halogen Free

2. Outline Dimension

Unit : mm

Tolerance : ± 0.1



3. Material Information

No.	Name	Description	Materials
1	Chip source	Blue LED	InGaN / Sapphire
2	Body	thermosetting	EMC
3	Lead frame base	Metal	Copper alloy
4	Wire	Gold Wire	Au
5	Encapsulation	Transparent	Silicone
6	Zener Diode	ESD Protection	Si
7	Color Concept	Phosphor	Aluminate Yellow + Nitride RED

4. Absolute Maximum Ratings

(Ta=25°C)

Item	Symbol	Absolute Maximum Ratings	Unit
Forward Current	I_F	500	mA
Power Dissipation	P_D	2.1	W
Reverse Current	I_R	50	mA
Pulse Forward Current *1	I_{FP*1}	800	mA
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Solder Temperature	T_{sld}	Reflow 260 °C,10sec under Hand 340 °C 3sec under	°C
Junction Temperature	T_j	162.5	°C

*1. Pulse Width ≤ 10msec, Duty ≤ 10%

5. Electrical/Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Value			Unit	
			Min	Typ	Max		
Luminous Intensity *1	I _v	IF=250mA	-	49	-	cd	
Luminous Flux *1	Φ _v		-	150	-	lm	
Forward Voltage *2	V _F		6.0	-	6.8	V	
Forward Voltage	V _{FL}	IF=10uA	4.0	-	-	V	
Chromaticity Coordinate *3	C1,D1,E1	IF=250m	Cx	0.263	0.277	0.290	-
		A	Cy	0.224	0.242	0.259	-
Reverse Voltage	V _R	IR=-5mA	-0.7		-1.2	V	
View Angle	Peak	IF=250mA		120			
Thermal Resistance (Junction to Solder)	Rth,j-s	IF=250mA		15		°C/W	
Life Time*4		Tj Max 110°C	30,000	-	-	hr	
ESD	-	-	5	-	-	KV	
Peak Wavelength	Wp	-	437		453	nm	

*1. Luminous Intensity(Flux) Measurement Allowance is ± 5%

*2. Forward Voltage Measurement : ±0.1V

*3. CIE Coordinates Measurement: ±0.005

*4. Estimated Time to 50% Degradation for Initial Luminous Intensity Based on WOOREE E&L's Internal Test Results.

6. Rank Information

(1) Luminous Intensity

Rank	Condition	Luminous Intensity
H1		41 ~ 42
I1		42 ~ 43
J1		43 ~ 44
K1		44 ~ 45
L1		45 ~ 46
M1		46 ~ 47
N1		47 ~ 48
O1		48 ~ 49
P1		49 ~ 50
Q1		50 ~ 51
R1		51 ~ 52
S1		52 ~ 53


(2) Forward Voltage

Code	Condition	Min.	Max.	Unit
0	IF = 250mA	6.0	6.8	V

(3) Peak Wavelength

Code	Condition	Min.	Max.	Unit
A	IF = 250mA	437	442	nm
B		442	448	
C		448	453	


(4) Chromaticity Coordinates Diagram

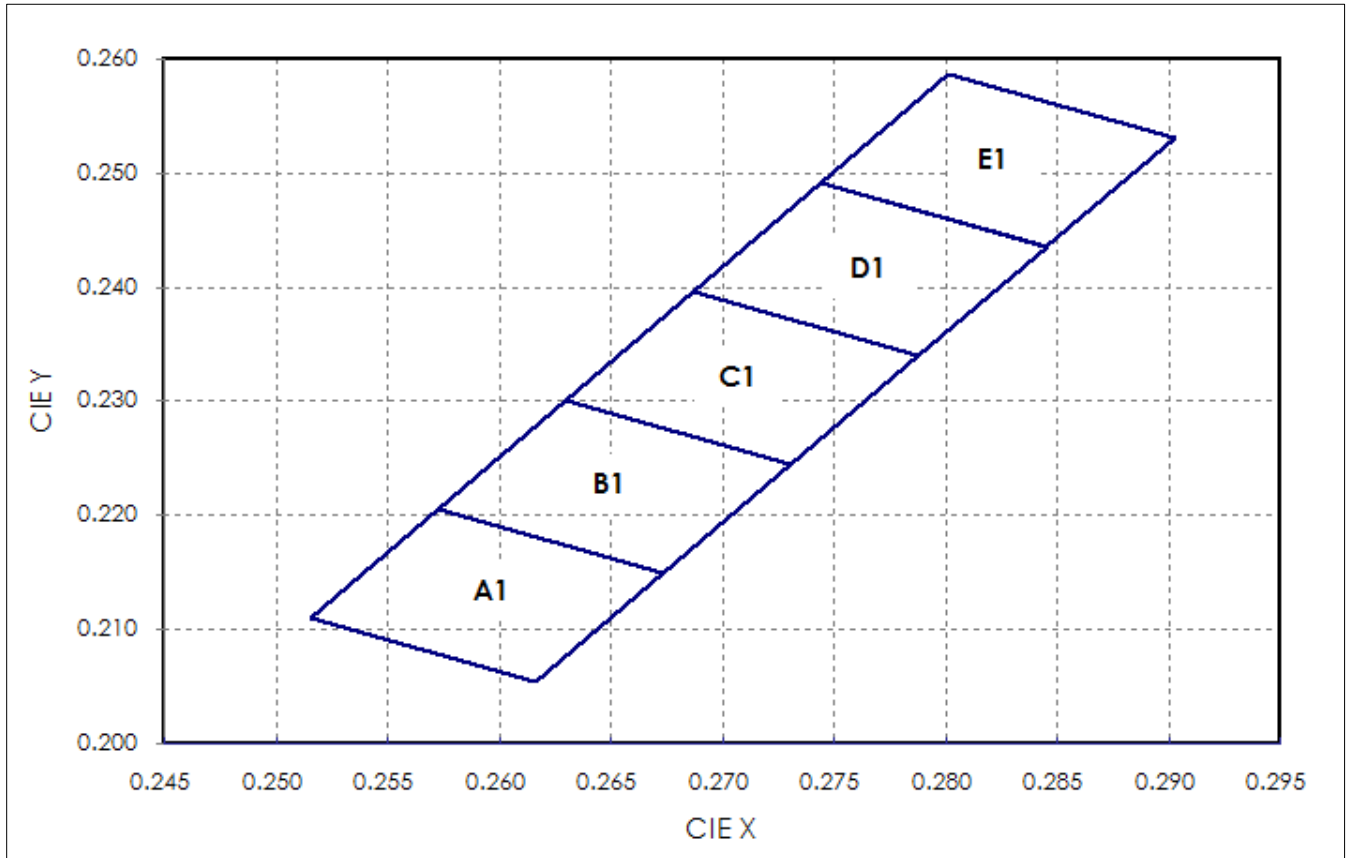

7. Characteristic Diagrams


(1) Forward Voltage vs Forward Current

(Ta = 25 °C)

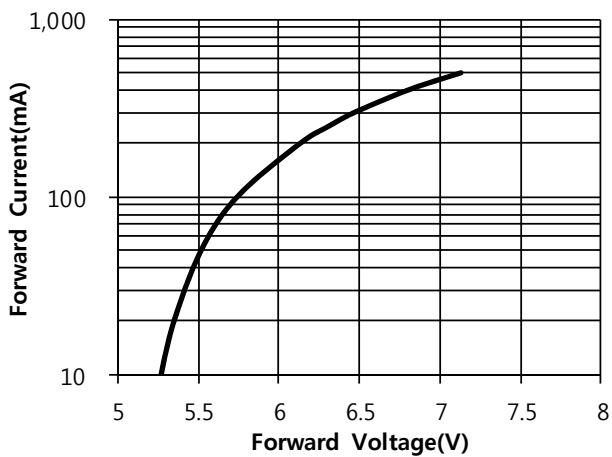


(2) Forward Current vs Relative L-Flux


(Ta = 25 °C)

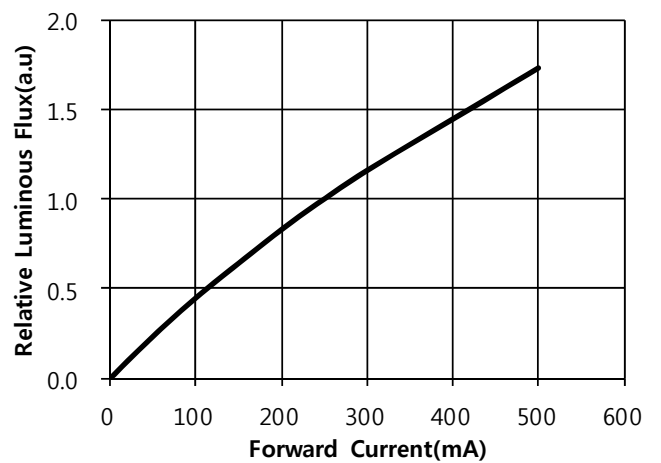


(3) Ambient Temperature vs Allowable Forward Current

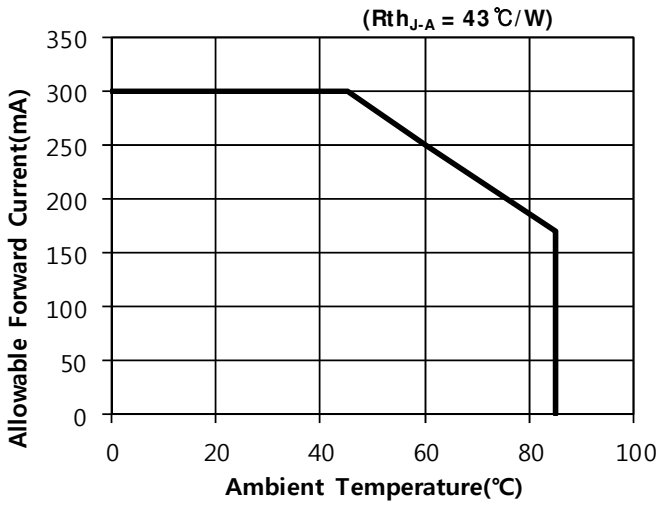


(4) Ambient Temperature vs Relative L-Flux

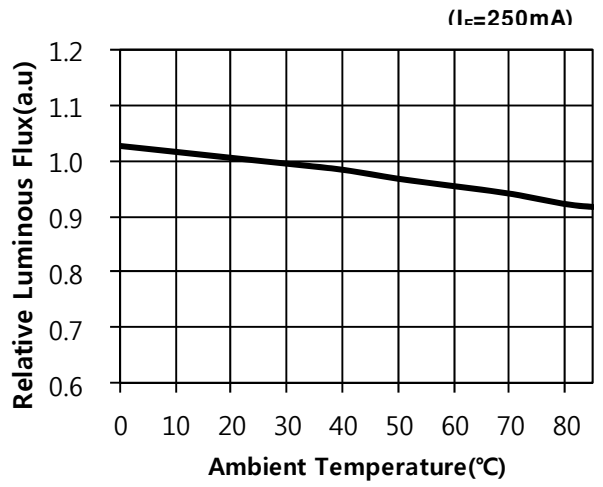


(5) Forward Current vs Chromaticity Coordinate

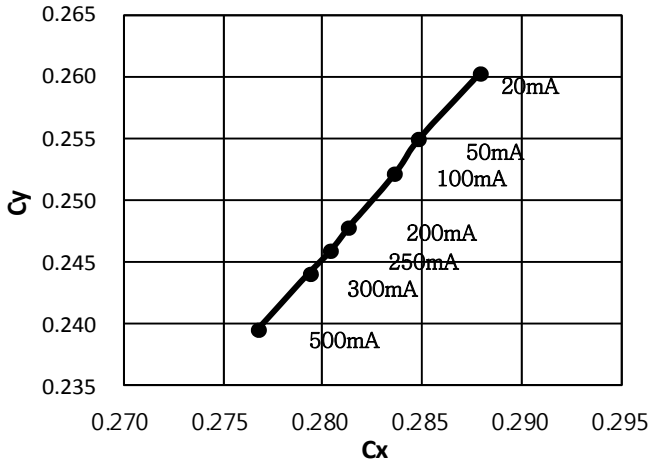


(6) Ambient Temperature vs Chromaticity Coordinate

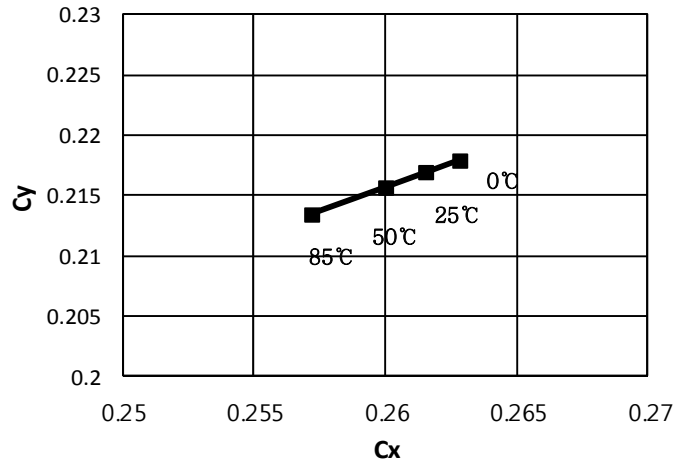


(7) Ambient Temperature vs Forward Voltage

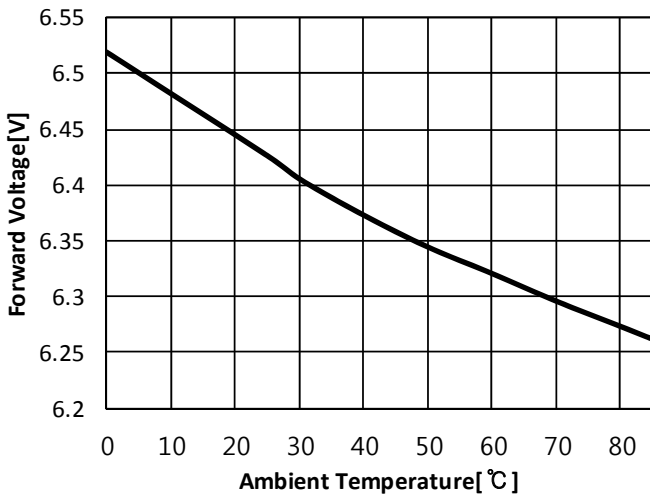

(8) View angle Profile

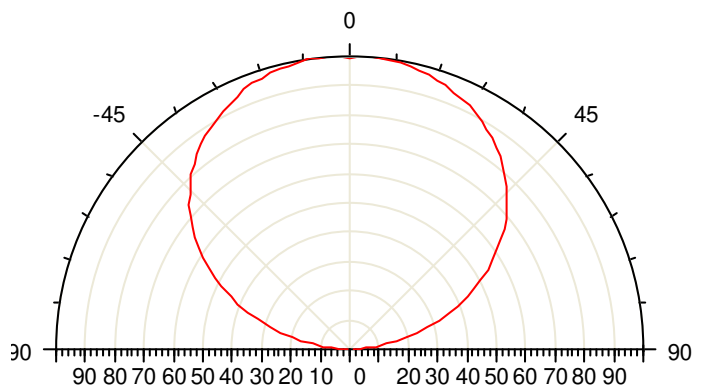

(9) Color Spectrum

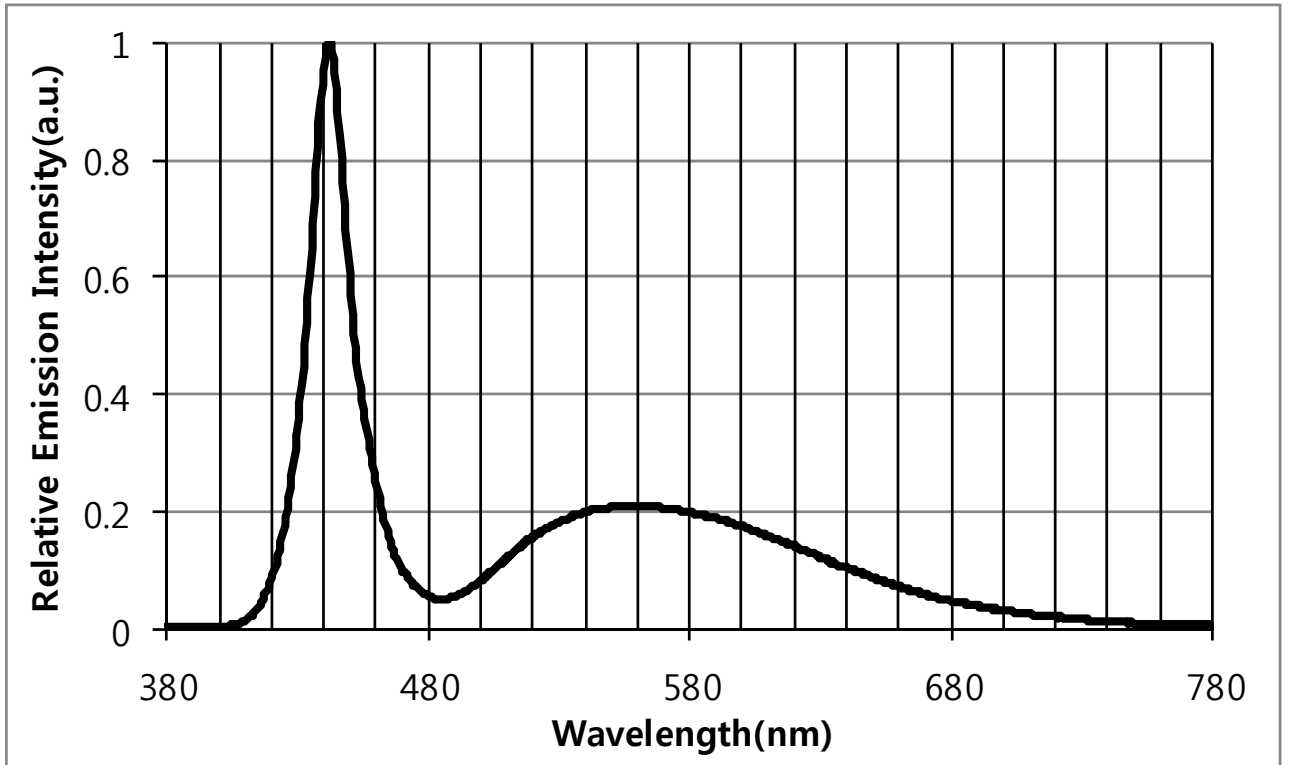

8. Reliability

(1) Test Items and Results

NO	Test Item	Standard Test Method	Test Conditions	Note	Number of Damaged
1	Temperature Cycle	JEITA ED-4701 100 105	40°C~25°C~100°C~25°C 30min. 5min. 30min. 5min	200 cycles	0/20
2	High Temperature Storage	JEITA ED-4701 200 201	Ta=100°C	1000 hrs	0/20
3	Temperature Humidity Storage	JEITA ED-4701 100 103	Ta=85°C, RH=85%	1000 hrs	0/20
4	Low Temperature Storage	JEITA ED-4701 200 202	Ta=-40°C	1000 hrs	0/20
5	Steady State Operating Life	-	Ta=25°C, I _f =310mA	1000 hrs	0/20
6	Steady State Operating Life of High Temperature	-	Ta=85°C, I _f =310mA	1000 hrs	0/20
7	Steady State Operating Life of High Humidity Heat	-	Ta=85°C, RH=85%, I _f =310mA	1000 hrs	0/20

8	Steady State Operating Life of Low Temperature	-	Ta=-40°C, I _F =310mA	1000 hrs	0/20
9	Electro-Static Discharge Threshold	ESD (HBM)	1500Ω, 100pF (Forward/Reverse)	6000V	0/10


(2) Criteria for Judging the Damage

Item	Symbol	Test Condition	Criteria for Judgement	
			Min.	Max.
Forward Voltage	V _F	I _F =250mA	-	USL *1 × 1.1
Luminous Intensity	I _V	I _F =250mA	LSL*2 × 0.7	


*1) U.S.L. : Upper Standard Level *2) L.S.L : Lower Standard Level

(3) Silicone Depth Judgment

Silicone Depth Spec

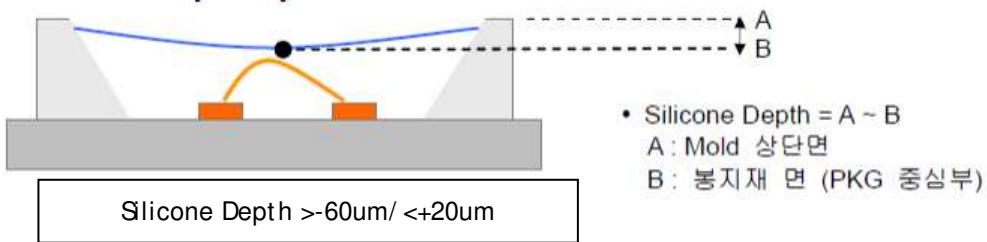

Silicone Depth Spec 불량

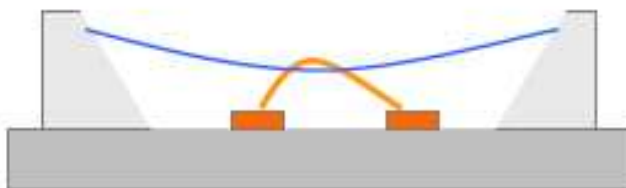


• Wire가 봉지재 위로 노출되어 불량 임.

9. Precautions to Taken

(1) Recommend Soldering Conditions

Reflow Soldering		Hand Soldering(Lead Part)	
	Lead Free Solder		
Pre-heat	180~200°C	Temperature Soldering Time	Max. 340°C Max. 3sec (Only One Time)
Pre-heat time	120sec. Max.		
Peak Temperature	Max. 260°C		
Soldering Time	Max. 10sec		
Condition			

Temperature-profile

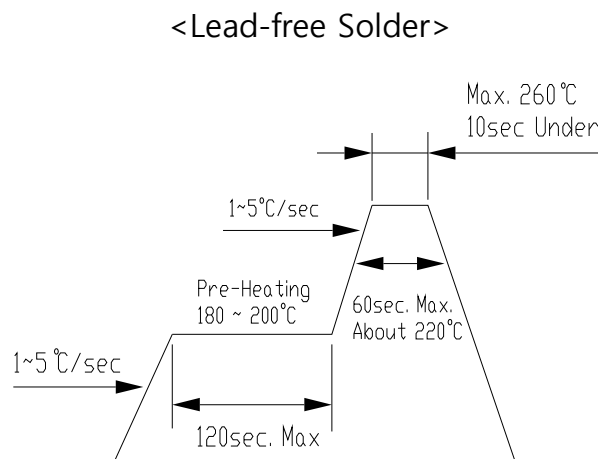

(2)Moisture Proof Package

When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage to the optical characteristics of the LEDs. For this reason, the moisture proof package is used to keep moisture to a minimum in the package. The moisture proof package is made of an aluminum moisture proof bag. A package of a moisture absorbent material(silica gel) is inserted into the aluminum moisture proof bag. The silica gel changes its color from blue to pink as it absorbs moisture.

(3)Storage

[Storage conditions]

Before opening the package

The LEDs should be kept at 30°C or less and 90% RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material(silica gel) is recommended.

After opening the package

The LEDs should be kept at 30°C or less and 70% RH or less. The LEDs should be soldered within 168 hours(7days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with package of moisture absorbent material(silica gel). It is also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.

If the moisture absorbent material(silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment : more than 24hours at 65±5°C

WOOREE LED part's electrodes and leadframes are silver plated copper alloy.

The silver surface may be affected by environments which contain corrosive substances.

Please avoid conditions which may cause the LED to corrode, tarnish or discolor.

The corrosion or discoloration might lower solderability or might affect on optical Characteristics.

Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.

(4)Heat Generation

Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in the specification.


The operating current should be decided after considering the ambient maximum temperature of LEDs.

10. Packing & Label


(1) Taping Part

Unit : mm

Tolerance : ± 0.1


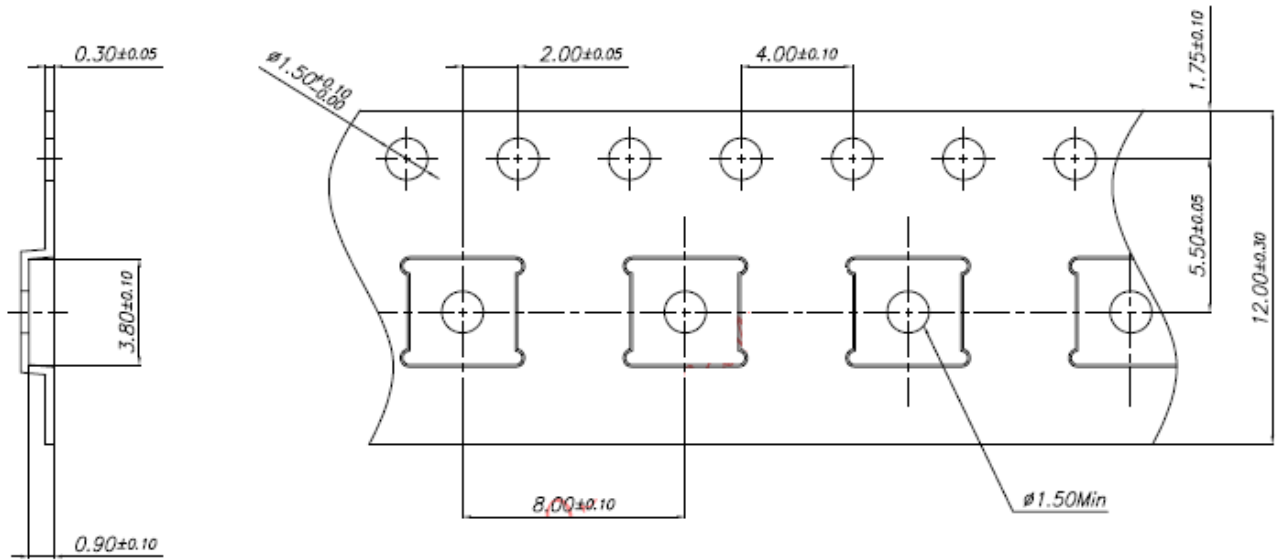


(2) Reel Part (Q'ty : 1,500ea/Reel)

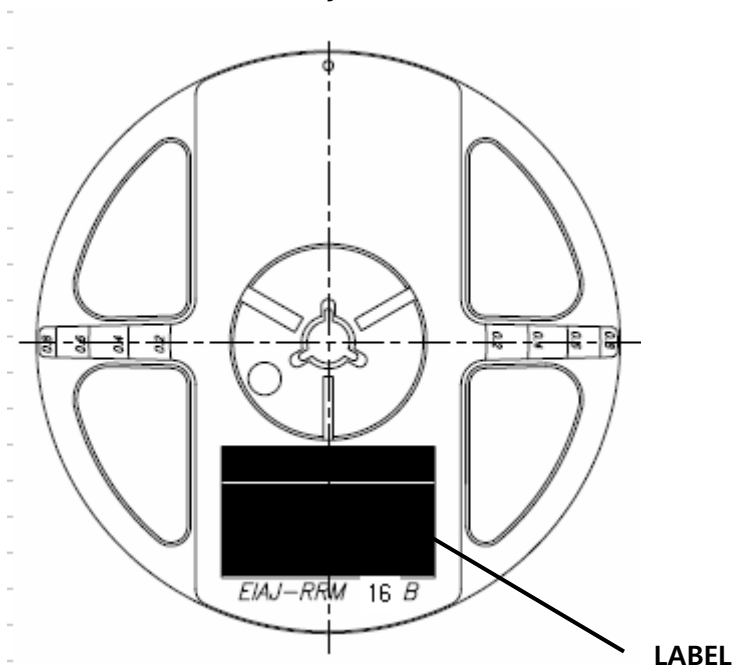

(3) Boxing


Shield Bag (with Silica gel)

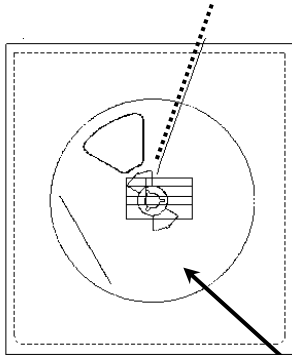

Reel



Label




Inner Box




Out box

Box	Dimension (mm)	Reel/Box	Quantity/Box
Inner box	500*260*250	30 Reel max.	90,000 ea
Out box	555*515*540	120 Reel max.	360,000 ea

(4) Label Information

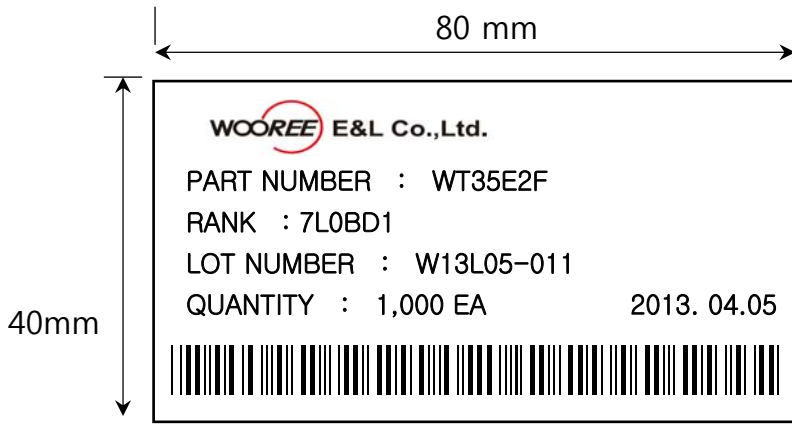

(5) Lot Number

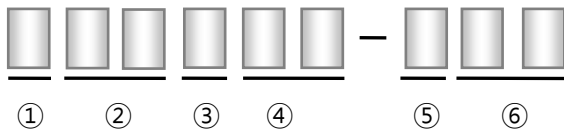

- ① WOOREE E & L Initial
- ② Year (10 for 2010, 11 for 2011)
- ③ Month (A for Jan., B for Feb., ... , N for Dec.)
- ④ Day (01 for 1,...31 for 31)
- ⑤ Product Number(0,1) : Normal Lot : "0" , Merge Lot : "1" : PKG Site(An-San)
 (A,B) Normal Lot : "A" , Merge Lot : "B" : PKG Site(Vina)
- ⑥ Product Number (01,02,03, ... ,99)

(6) Rank Code Description

